MuteDesign®

Space S

Sublime, ergonomic and functional, Space S provides your office with a peaceful and serene workspace, allowing maximum focus and minimal distraction. More than a simple booth, Space S is packed with technological goodness in a meticulously designed construction, where you can be fully connected with the outside world while avoiding its day to day clutter. Its beautiful design and best in class acoustic properties, make Space S a refined symbiosis of style, craftsmanship and performance.

www.mute.design

Acoustic properties

Dimensions

Function

 Isolation

Width	**External** 1000 mm / **Internal** 805 mm
Depth	**External** 1000 mm / **Internal** 887 mm
Height	**External** 2247 mm* / **Internal** 2080 mm
External depth with open door	1700 mm
Weight net	350 kg
Weight gross	420kg (including wooden case and packaging parts)
Stool weight	9,5 kg

*20 mm should be added to the floor height to level the pod's floor.

Acoustic performance

 Low tones

 Mid tones

 High tones

2247 mm +/- 4 mm

1095 mm +/- 2 mm

Stool is available as an option.

ø 360 mm

595-775 mm

Results

Average acoustic isolation

50,0
40,0
30,0
20,0
10,0
0,0

125 Hz   250 Hz   500 Hz   1000 Hz   2000 Hz   4000 Hz
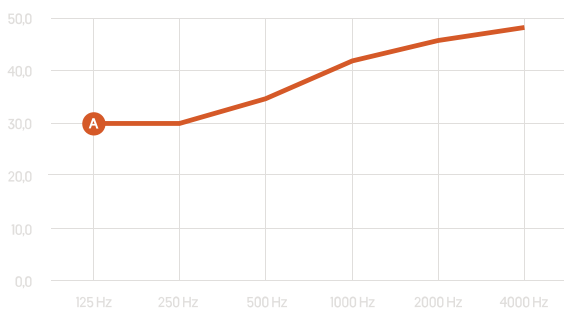
A Space S sound isolation [dB]   x - Frequency [Hz]   y - Sound isolation [dB]

1000 mm +/- 2 mm

805 mm +/- 2 mm

Output of power supply wire 3 m in bottom connection option

296 mm +/- 2 mm

700 mm +/- 2 mm

Output of power supply wire 3 m in top connection option

692 mm

700 mm +/- 2 mm

Left-handed door.

Composition

The construction of Space S is the effect of work of our acoustics, technology and design departments. Walls of Space S pod are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

Wall structure

- Metal covers
- Plywood
- Isolating materials
- Absorbing materials
- Secure glass
- Felt

Stool cover

REMIX 3 by Kvadrat [Price Group 4]

Composition	90% new wool, 10% nylon
Weight	300 g/m²
Width	140cm
Flammability	BS EN 1021-1, BS EN 1021-2
Abrasion resistance	100'000 Martindale cycles
Pilling resistance	3-4

Check all available colours on our website

Additional information

Acoustic performance:

Inside RT20* performance

Frequency	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
RT20* [s]	0,2	0,1	0,1	0,1	0,1	0,1

*According to PN-EN ISO 354:2005

Fan performance:

Airflow: **63 m3 / hour / person**

Fan emitted noise level outside: **Laeq <= 35 dB** [at a distance of 1.5 m]

Fan emitted noise level inside: **Laeq <= 39 dB**

[Fan noise is comparable to noise in typical open offices [below 45 dB] and will create an acoustic background for employees in the vicinity of the pod]

Activated by occupancy sensor: **Yes**

Lighting performance:

Power: **7 W**

Brightness: **307 lx [615 lm at source]**

Light colour temperature: **3000K**

Glass light performance (EN 410):

Light transmission: **87**

Light reflection: **8**

Solar energy transmittance: **70**

Reflection of solar radiation energy: **7**

Total solar energy transmittance: **76**

Power consumption:

Work: **16 W** [fans, LED]

Standby: **4,5 W**

CE mark: **Yes**

RoHS compliance: **Yes**

Power supply:

Max. power: **35 W** [excluding receivers connected to the power socket]

Powersource voltage: **100 – 240 V AC** [50/60Hz]

Supply voltage for ventilation, lighting and additional equipment: **12 V DC - 24 V DC**

Packaging

Space S is delivered in a wooden case:

- Dimensions: **(A)** 2300 mm x **(B)** 850mm x **(C)** 1300 mm
- Gross weight: approx. 420kg with packing parts.

How to keep the product in good conditions

- Keep the product dry

- Vacuum and clean regularly

- Follow the assembly instructions and terms of use

Product recommended for

- Open-space

- Call-center

- Library

- Reception

- Break-out area

- Other public spaces (including railway stations and airports)

Finishes

① External: **Walls and roof colour**

STANDARD

Snow White Matt RAL 9003	**New York Grey Matt** RAL 7042

OPTIONS

|				
Powder Grey Ultra Matt RAL 7035	**New York Grey Ultra Matt** RAL 7042	**Pepper Grey Ultra Matt** RAL 7012	**Panther Black Ultra Matt** RAL 9005	**Chilli Red Ultra Matt** RAL 3020
Pumpkin Orange Ultra Matt RAL 2004	**St. Tropez Yellow Ultra Matt** RAL 1018	**Basil Green Ultra Matt** RAL 6032	**Midnight Green Ultra Matt** RAL 6004	**Navy Blue Ultra Matt** RAL 5003

② External: **Frame finish**

STANDARD

Snow White NCS S 0500-N	**New York Grey** NCS S 3000-N

③ Internal: **Tabletop**

OPTIONS

Powder Grey NCS 1502-G	**Panther Black** NCS S 8502-B	**Chilli Red** NCS 1085-Y85R	**Pumpkin Orange** NCS S 0585-Y70R	**Basil Green** NCS S 3060-G10Y
Navy Blue NCS S 7020-R80B	**Ash Veneer**	**Oak Veneer**	**Walnut Veneer**	
White premium laminate Anti-fingerprint laminate	**Black premium laminate** Anti-fingerprint laminate			

## ④ Internal: **Stool**

OPTIONS

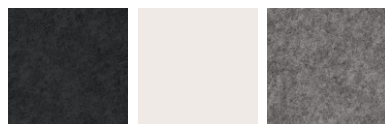|			
Kvadrat Remix 3 852	Kvadrat Remix 3 773	Kvadrat Remix 3 982	Kvadrat Remix 3 543
Kvadrat Remix 3 152	Kvadrat Remix 3 242	Kvadrat Remix 3 183	Kvadrat Remix 3 133
Kvadrat Remix 3 643	Kvadrat Remix 3 123		

⑤ Internal: **Felt**

STANDARD

Graphite	**Beige**	**Grey**

Equipment

STANDARD

Ventilation system	LED light	Occupancy sensor
Electric sockets*	Graphite carpet	Wall hook with 5 kg load capacity

OPTIONS

|			
Double USB-A port** integrated in a tabletop	Induction charger** integrated in a tabletop	LAN connection*** with 10 m wire	High adjustable stool with footrest

*   As a standard, there is installed electric wire type FR. Other electrical standards should be marked on the order.

**   Electric socket, USB ports, induction charger are available only in black.

*** An optional 10 m LAN cable is set with a main power wire.